


## Connection Board for i-PAN4

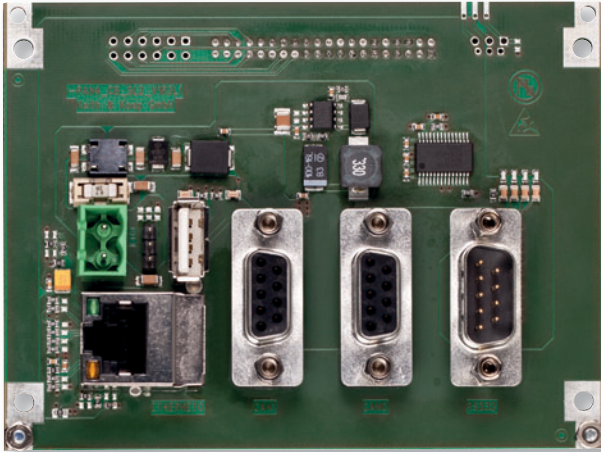

Expandability	
Connection Board Interfaces	Industrial Power Plug, USB 2.0 Host-A, 1 x 10/100 MBit Ethernet RJ45, 2 x non-isolated CAN D-SUB 9, RS232 D-SUB 9, SL2-12 2.54mm field: I2C, HSADC, SPDIF, SL1-3 2.54mm field: Stereo Headphone
General Details	
Voltage Supply	Industrial +7V up to +24V supply
Operating Temperature	-20°C ... +85°C industrial
Dimensions	105.5 mm x 79 mm x 23 mm (W x H x D)
Environmental Standard	RoHS, REACH, WEEE
Include	Distance pieces, screws and nuts
Availability	10 years form, function*
Order code	33 405

SL2-12 field PIN configuration												
PIN	1	2	3	4	5	6	7	8	9	10	11	12
Signal	Ground	VCC EXT	Ground	+3V3 Aux	Ground	PWM3	SPDIF	HSADC	PSWITCH E	LRADCO	I2C CLK	I2C Data
SL1-3 field PIN configuration												
PIN	1				2				3			
Signal	Headphone L				Headphone Ground				Headphone R			